

DS-UPS2000
UPS

114-693





- Built-in AVR
- Super fast charging
- Wide input voltage range
- Overload protection
- Short circuit protection
- Surge protection
- USB port for remote control
- LCD display

▪ Specification

Power	
UPS Capacity	2000 VA / 1200 W
Input	
Input Voltage Range	140 VAC to 290 VAC
Input Frequency	50/60 Hz self-adaptive
Plug Type	AU TYPE I
Output	
Output Voltage Range	210 VAC to 235 VAC
Output Frequency	50/60 Hz ± 0.5 Hz self-adaptive
Transfer Time	≤ 10 ms
Waveform	PWM
Outlet Type	AU TYPE I
Outlet Number	4
Battery	
Battery Type	12 V/9 Ah *2 pcs, lead-acid battery
Recharge Time	6-8 hours recover to 90% capacity
Typical Backup Time	Run time at 100w: 70 min Run time at 300w: 17 min Run time at 600w: 5 min
Interface	
Communicate Ports	USB
Protection	
Full Protection	Surge protection, Overload protection, Discharge protection, Short circuit protection
Indicator	
Display	LCD Screen Input Voltage, Output Voltage, Battery capacity, load level
Alarm	Charging Mode (DC mode): Sounding every 8 seconds Low Battery: Sounding every second Overloading Mode: Sounding every 0.5 seconds Fault: Continuously sounding
General	
Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
Operating Humidity	30% to 90% (non-condensing)
Dimension	345 mm × 122 mm × 192 mm (13.58" × 4.80" × 7.56")
Weight	Approx. 11 kg (24.3 lb)

▪ Dimension

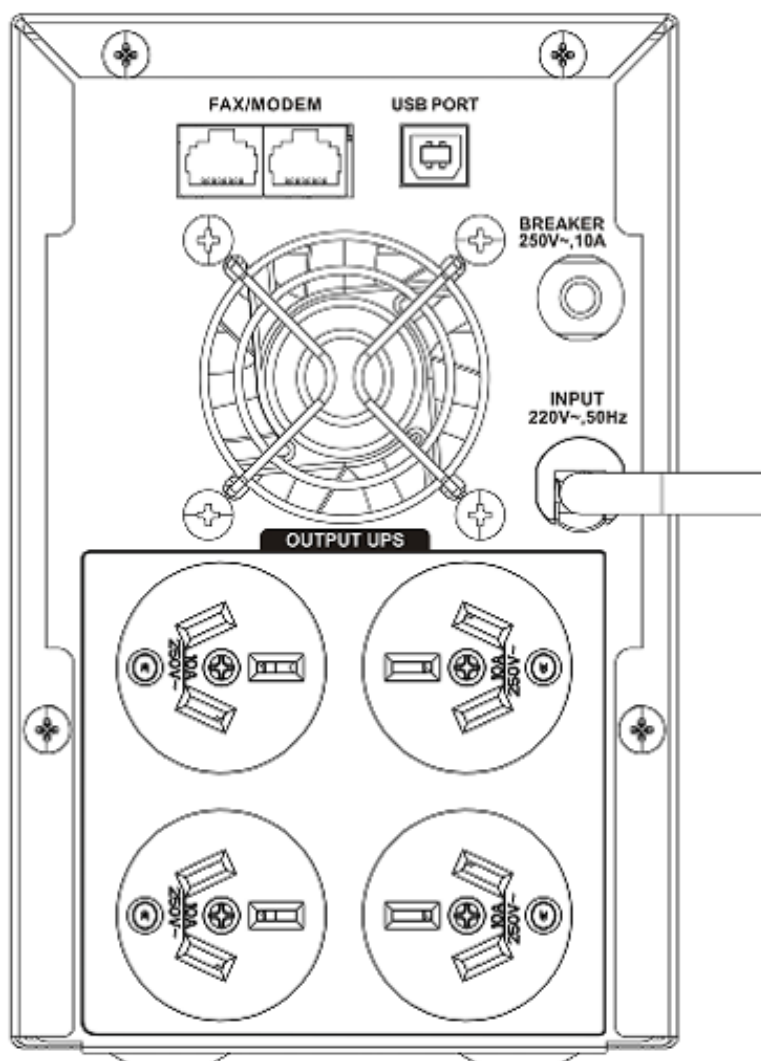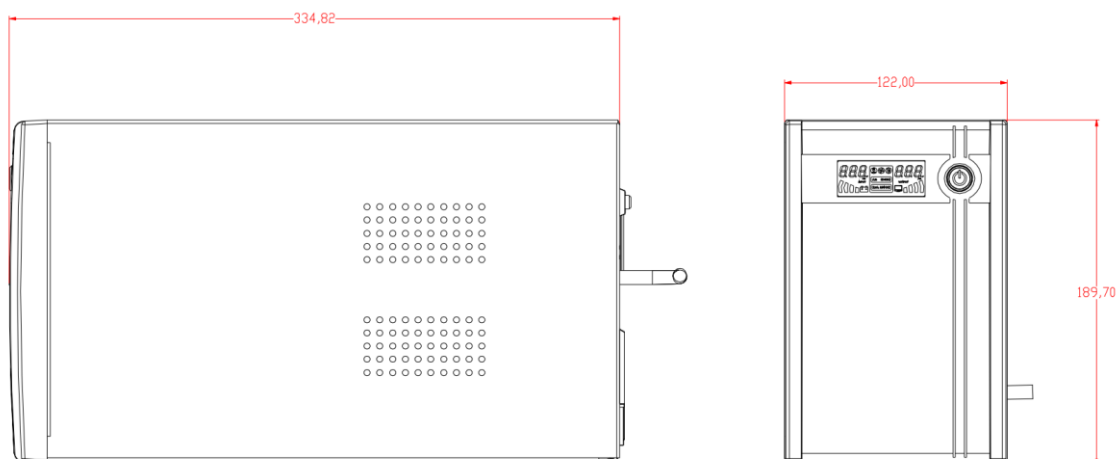

ORDERING INFORMATION

114-693 Hikvision DS-UPS2000-AU 2000VA UPS



Innovative Electronic Solutions
www.ness.com.au



NSW Ph 02 8825 9222
sales@ness.com.au

VIC Ph 03 9875 6400
nessmelb@ness.com.au

QLD Ph 07 3399 4910
nessbris@ness.com.au

WA Ph 08 9328 2511
nessper@ness.com.au

SA Ph 08 8152 0000
adelaide@ness.com.au