


DS-KAD706
Two-Wire Video/Audio Distributor

104-222

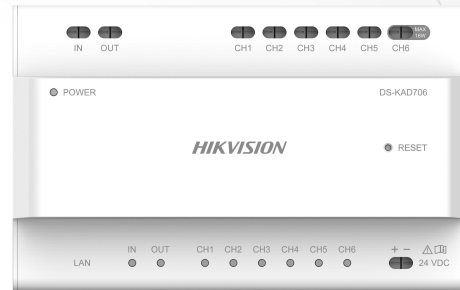


Key Feature

- 6 two-wire cascade interfaces, including 1 interface (max. 16 W) used for connecting door station
- 2 cascade interfaces used for cascading DS-KAD706 and DS-KAD706-S
- 8 interface indicators used for displaying network status of interfaces


Specification

Model	DS-KAD706	
Interface	Network interface	1, RJ45 (1-ch reserved terminal and 1-ch for WAN access)
	2-Wire interface	6-ch for device power supply, including 1-ch for door station power supply with max. output power 16 W
	Reset	1
	Signal indicator	8 signal indicators for indicating 6-ch input and output signal
	Power indicator	1
General	Power supply	24 VDC
	Power consumption	< 9 W
	Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
	Working humidity	10% to 90%

Typical Application

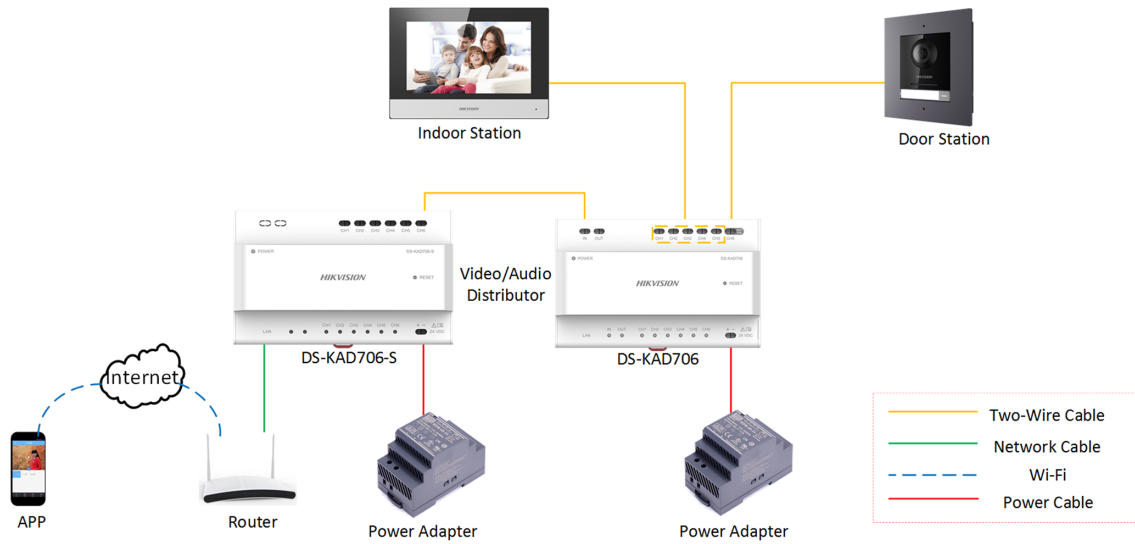

Physical Interface

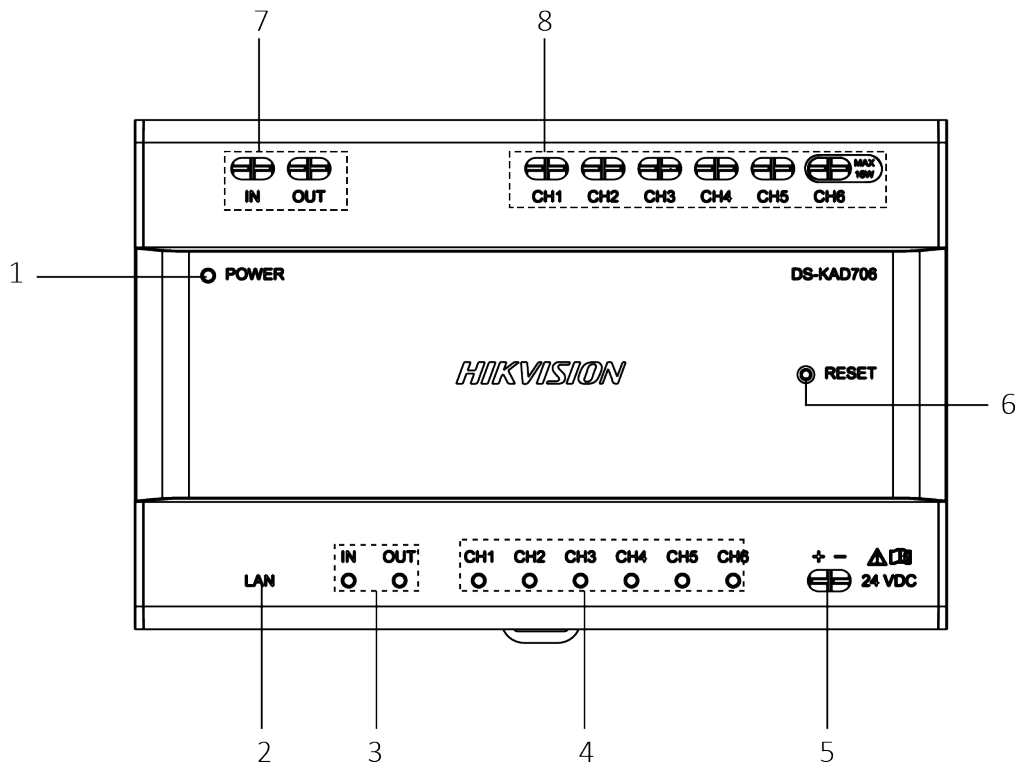

No.	Description	No.	Description
1	Power Indicator	5	Power Input
2	Network Interface	6	Reset Button

No.	Description	No.	Description
3	Cascade Network Indicator	7	Cascade Interface
4	Network Indicator	8	Interface

ORDERING INFORMATION

104-222 Hikvision DS-KAD706-P 2 Wire Controller



Innovative Electronic Solutions
www.ness.com.au



NSW Ph 02 8825 9222
sales@ness.com.au

VIC Ph 03 9875 6400
nessmelb@ness.com.au

QLD Ph 07 3399 4910
nessbris@ness.com.au

WA Ph 08 9328 2511
nessper@ness.com.au

SA Ph 08 8152 0000
adelaide@ness.com.au