

Get Ness Mezzo app



ANDROID



iOS

Ness-Bridge

Ness Mezzo

Ethernet Interface Module

Free app for Android and iOS

Ness-Bridge is an easy to install ethernet interface providing internet connectivity for Ness D8/D16 control panels.

Ness-Bridge in combination with the free **Ness Mezzo** app provides handy remote operation features for your Ness control panels.


- Arm and Disarm
- Home Mode operation
- Operate D8/D16 outputs¹
- Receive Push Notifications for Arm/Disarm and alarm events
- View zones and panel status

SIMPLE
HARDWARE
INSTALLATION

POWERFUL
FREE
APP

EASY ADD-ON
FOR
NESS D8/D16
PANELS

OPERATE
YOUR PANEL
REMOTELY

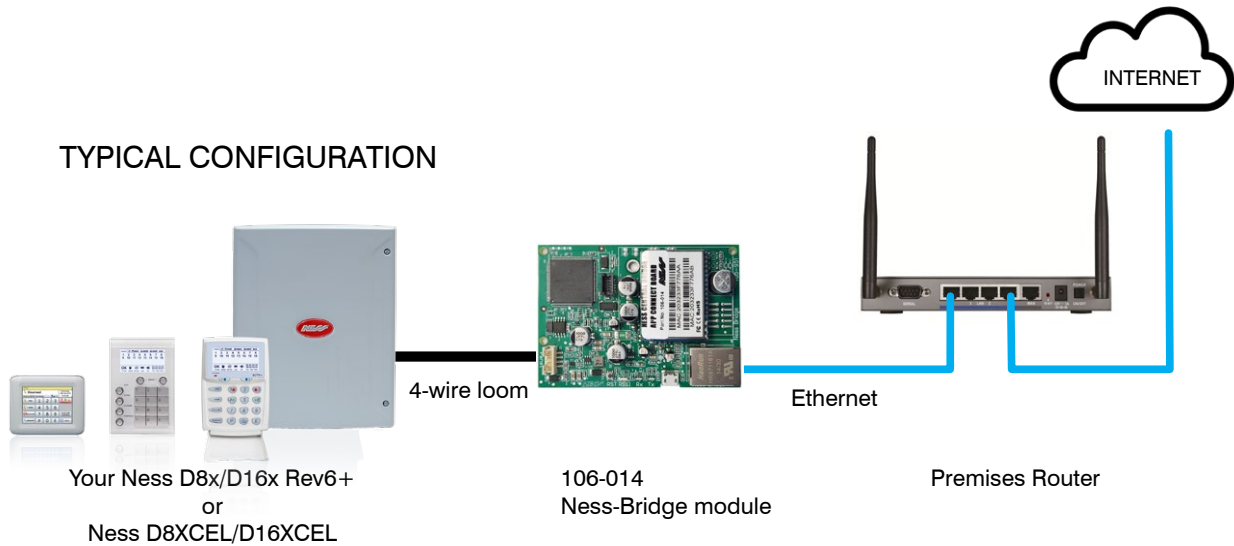


Ness-Bridge is an easy installation in Ness D8/D16 housings.

Includes red slider mounting rails & 4-wire loom.

To D8/D16 SERIAL header (4 wire loom included)

Ness-Bridge module

Ethernet to local LAN

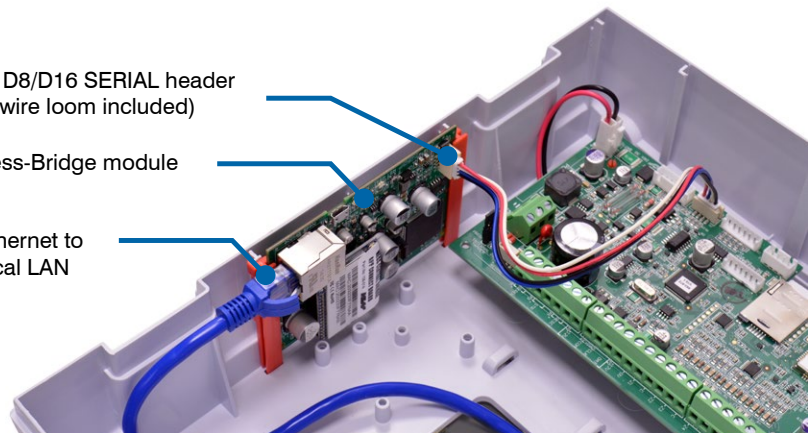

Specifications

NESS-BRIDGE PCB DIMENSIONS	92 x 65 x 18mm
INTERFACE	RJ45 Ethernet to local LAN / 4-wire loom to control panel
POWER REQUIREMENT	13.8V DC via 4-wire loom to D8/D16
AVERAGE CURRENT DRAW	120mA
COMPATIBILITY	Ness D8XD / D16XD (Rev6 and later), D8XCEL 4G / D16XCEL 4G

¹ Outputs require optional 106-013 Relay Board/s. Other conditions apply, refer to the manual. Operation of outputs via Mezzo app is not supported in D8/D16 V6.x to V7.x

PANIC function is not available in D8/D16 V6.x and D8/D16 V10.8

Ordering Information

106-014 Ness-Bridge Ethernet interface



Innovative Electronic Solutions
www.ness.com.au



NSW Ph 02 8825 9222
sales@ness.com.au

VIC Ph 03 9875 6400
nessmelb@ness.com.au

QLD Ph 07 3399 4910
nessbris@ness.com.au

WA Ph 08 9328 2511
nessper@ness.com.au

SA Ph 08 8152 0000
adelaide@ness.com.au