

Get Ness Mezzo app



ANDROID



iOS

## Ness-Bridge

Ethernet Interface Module

## Ness Mezzo

Free app for Android and iOS

Ness-Bridge is an easy to install ethernet interface providing internet connectivity for Ness DPlus/D8/D16 control panels.

Ness-Bridge in combination with the free **Ness Mezzo** app provides handy remote operation features for your Ness control panels.

- Arm and Disarm
- Home Mode operation
- Operate DPlus/D8/D16 outputs<sup>1</sup>
- Receive Push Notifications for Arm/Disarm and alarm events
- View zones and panel status

SIMPLE  
HARDWARE  
INSTALLATION

POWERFUL  
FREE  
APP

EASY ADD-ON  
FOR  
NESS DPLUS  
& D8/D16  
PANELS


OPERATE  
YOUR PANEL  
REMOTELY



Compatible

# Ness-Bridge Ethernet Interface

## TYPICAL CONFIGURATION

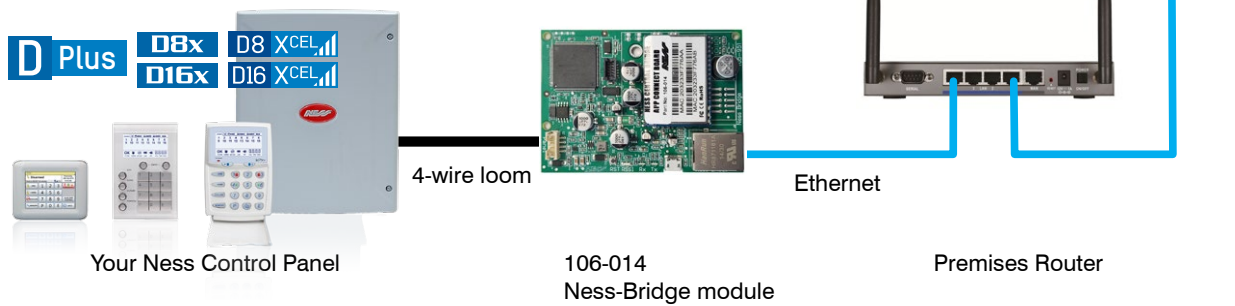


Ness-Bridge is an easy installation in Ness plastic panel housings.

Includes red slider mounting rails & 4-wire loom.

To D8/D16 SERIAL header  
(4 wire loom included)

Ness-Bridge module

Ethernet to  
local LAN

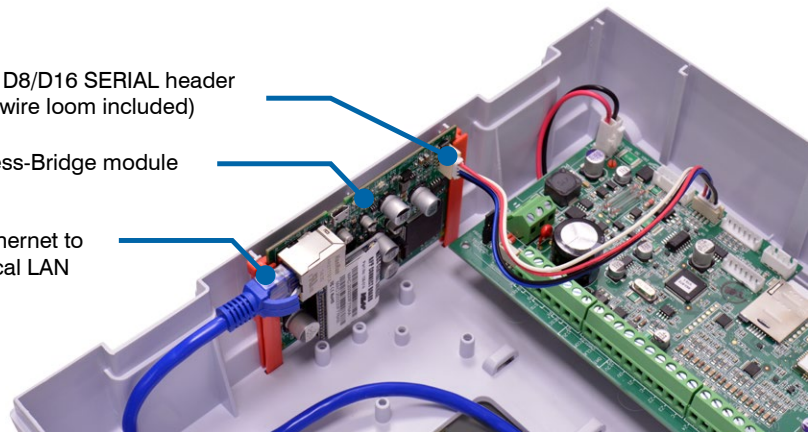

## Specifications

NESS-BRIDGE PCB DIMENSIONS	92 x 65 x 18mm
INTERFACE	RJ45 Ethernet to local LAN / 4-wire loom to the control panel
POWER REQUIREMENT	13.8V DC via 4-wire loom to the control panel
AVERAGE CURRENT DRAW	120mA
COMPATIBILITY	Ness DPlus / D8XD / D16XD (Rev6 and later), D8XCEL 4G / D16XCEL 4G

<sup>1</sup> Outputs require optional 106-013 Relay Board/s. Other conditions apply, refer to the manual. Operation of outputs via Mezzo app is not supported in D8/D16 V6.x to V7.x

PANIC function is not available in D8/D16 V6.x and D8/D16 V10.8

## Ordering Information

106-014 Ness-Bridge Ethernet interface



Innovative Electronic Solutions  
www.ness.com.au



NSW Ph 02 8825 9222  
sales@ness.com.au

VIC Ph 03 9875 6400  
nessmelb@ness.com.au

QLD Ph 07 3399 4910  
nessbris@ness.com.au

WA Ph 08 9328 2511  
nessper@ness.com.au

SA Ph 08 8152 0000  
adelaide@ness.com.au