

Compatible

D8x

D8 XCEL

D Plus

D16x

D16 XCEL

106-101



NAVIGATOR

The sophisticated touch

Touch Screen Keypad

Ness Navigator Touch Screen Keypad combines great design and sophisticated functions to provide the ultimate user interface.

Teamed with the feature-packed Ness D8X/D16X, XCEL and DPlus family of control panels, Navigator provides both the user and the installer with unrivalled ease of use.

Navigator's user-friendly operation guides offer clear, easy-to-understand displays in plain English, along with intuitive touchscreen controls make it easy to view all your zones *with your own text descriptions*, get help and prompts for arming, disarming, operating outputs, emergency alarms and much more.

Operating your Ness alarm system has never been easier!



Navigator Touch Screen Keypad is supplied with selected Ness Navigator panel kits and available separately.

NESS
CORPORATION

MADE IN AUSTRALIA

NAVIGATOR


Touch Keypad Features

*Beauty, function and security
come together...*

Touch the screen to
activate alarms




Auxiliary Outputs
Programmable by
event or time.
Touch ON, Touch OFF.

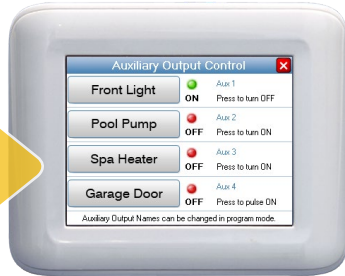


View and add your
own zone names



Convenient Installer
Information screen for
name, address and
contact details

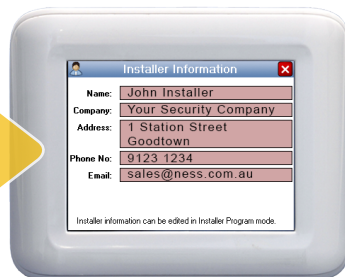

And much more...

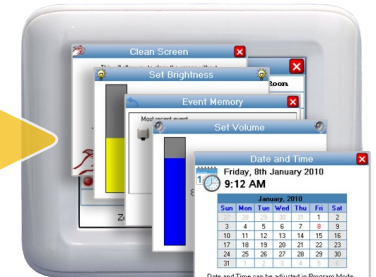

Specifications

PART NO.	106-101
MODEL	NESS NAVIGATOR TOUCH SCREEN KEYPAD GEN2
DIMENSIONS	108w x 86h x 15d mm.
DISPLAY TYPE	3.5" Colour LCD
DISPLAY RESOLUTION	320 x 240
TOUCH SCREEN	Touch sensitive surface
COMPATIBILITY	DPIus, D8/D16XCEL, D8x/D16x panels version 7 and later
MAX. KEYPADS	4 x Navigator Touch Keypads per panel Maximum current draw for all detectors and keypads should not exceed 500mA.
OPERATING VOLTAGE	12VDC supplied by the control panel
CURRENT DRAW	25mA with 50% backlighting, 50mA with 100% backlighting
DATA	2 wire proprietary Ness data bus

Ordering Information

106-101 Ness Navigator Touch Screen Keypad Gen2



Innovative Electronic Solutions
www.ness.com.au



NSW Ph 02 8825 9222
sales@ness.com.au

VIC Ph 03 9875 6400
nessmelb@ness.com.au

QLD Ph 07 3399 4910
nessbris@ness.com.au

WA Ph 08 9328 2511
nessper@ness.com.au

SA Ph 08 8152 0000
adelaide@ness.com.au