

**DS-PM1-RT-HWB**  
**433MHz Tri-X Wireless Receiver**

114-507




Tri-X wireless receiver, compatible with AX Hybrid Pro control panel, used to expand wireless capability of the control panel. HIKVISION Tri-X detectors can be added to AX Hybrid Pro panel via this wireless receiver.

- 433MHz wireless receiver
- Wireless transmission distance up to 1300m
- Supports 32 wireless detectors , 4 wireless indoor sounders and 8 wireless outdoor sounders

## ▪ Specification

Software features	
Compatibility list	DS-PS1-I-WB DS-PS1-E-WB DS-PM1-O1L-WB DS-PM1-O1H-WB DS-PDP15P-EG2-WB DS-PDC15-EG2-WB DS-PDD12P-EG2-WB DS-PDMC-EG2-WB DS-PDMCS-EG2-WB DS-PDEB1-EG2-WB DS-PDEBP1-EG2-WB DS-PDWL-E-WB DS-PDPG12P-EG2-WB DS-PDMCK-EG2-WB DS-PDTPH-E-WB DS-PDCL12-EG2-WB DS-PDC10AM-EG2-WB DS-PDC10DM-EGW-WB
Hardware features	
Bus	1 Speed-X bus
Electrical characteristics	
Power supply	9 to 28 VDC, 1A
Power consumption	Maximum current 100 mA@12 VDC; Quiescent current 40 mA@12 VDC
Wireless transmission	
RF frequency	433 MHz
Wireless security	Frequency hopping 128 AES encryption
Display	
LED Indicator	1. Green: power/find me 2. Orange: alarm/fault
General	
Dimension(WxHxD)	110 mm × 155 mm × 32 mm
Shell material	Plastic
Weight	233 g
Operation temperature	-10°C to 40°C
Operation humidity	10% to 90%
Device management	
Alarm input	Up to 32 wireless detectors(portable emergency button is not included)
Wireless sounder	Up to 4 wireless indoor sounder, 8 wireless outdoor sounder

- **Accessory**
- **Included**

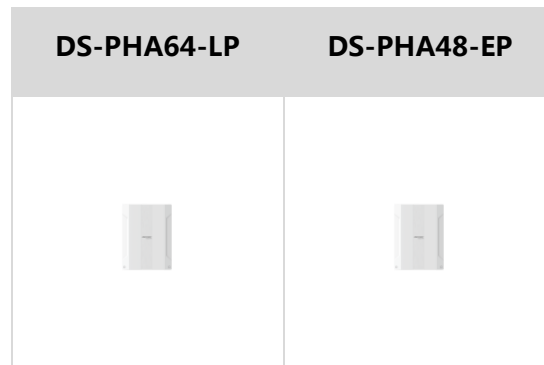

*\*The Detectors that DS-PM1-RT-HWB Supports*

## ORDERING INFORMATION

114-507

Hikvision DS-PM1-RT-HWB Tri-X Wireless Receiver



Innovative Electronic Solutions  
[www.ness.com.au](http://www.ness.com.au)



**NSW** Ph 02 8825 9222  
[sales@ness.com.au](mailto:sales@ness.com.au)

**VIC** Ph 03 9875 6400  
[nessmelb@ness.com.au](mailto:nessmelb@ness.com.au)

**QLD** Ph 07 3399 4910  
[nessbris@ness.com.au](mailto:nessbris@ness.com.au)

**WA** Ph 08 9328 2511  
[nessper@ness.com.au](mailto:nessper@ness.com.au)

**SA** Ph 08 8152 0000  
[adelaide@ness.com.au](mailto:adelaide@ness.com.au)