

HIKVISION


DS-KB2421-IM Video Intercom Door Station

104-103

Key Features

- Hands-free video intercom communication
- Supports two door stations in the intercom system
- Self-adaptive IR supplement (with photoresistor)
- One-touch calling
- Pinhole camera with 720 x 576 @ 25 fps
- Unlock controlling
- Anti-oxidant zinc alloy
- Vandal-resistant
- Convenient installation
- IP65

Typical Application

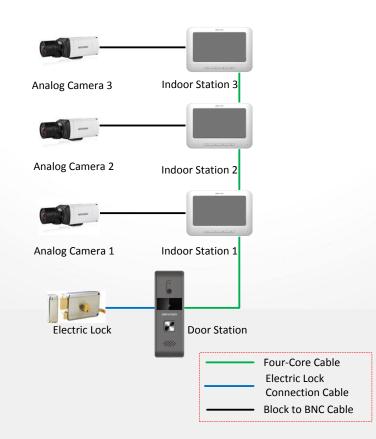






Specifications

Model		DS-KB2421-IM
Video parameters	Camera	1/4" CMOS
	Resolution	720 × 576
	Video frame rate	PAL: 25 fps
Audio parameters	Audio input	Built-in Omnidirectional Microphone
	Audio output	Built-in Loudspeaker
	Audio quality	Noise Suppression
Light supplement	Light supplement mode	Photosensitive IR Supplement, IR Range: 2 Meters
Device interfaces	Four-wire interface	1 Four-Wire Interface (1-ch Video Input, 1-ch Audio Input/Output, 1-ch Power Supply, 1-ch Grounding)
	I/O output	1 Relay Output
General	Material	Zinc Alloy
	Power consumption	Max. 5W
	Working temperature	-30° C to +70° C (-22° F to 158° F)
	Working humidity	10% to 90%
	Dimensions (L × W × H)	145 mm × 49.2 mm × 26.45 mm (5.7" × 1.9" × 1.0")



Appearance



Index	Description	
1	Microphone	
2	Built-in Camera	
3	Supplement Light	
4	Photoresistor	
5	Call Button	
6	Loudspeaker	

ORDERING INFORMATION

104-103

Hikvision DS-KB2421-IM



Innovative Electronic Solutions

www.ness.com.au



 NSW
 Ph 02 8825 9222
 VIC
 Ph 03 9875 6400
 QLD
 Ph 07 3399 4910
 WA
 Ph 08 9328 251

 sales@ness.com.au
 nessmelb@ness.com.au
 nessbris@ness.com.au
 nessbris@ness.com.au
 nessper@ness.com.au

 Ph 08 9328 2511
 SA
 Ph 08 8152 0000

 r@ness.com.au
 adelaide@ness.com.au

© 2020 Ness Corporation Pty Ltd ABN 28 069 984 372. Photos are used for illustrative purposes only. Design and specifications may vary. See the Ness Corporation web site for full warranty details.