

LAS60-57CN-RJ45
Single Port POE Midspan

104-709

Key Features

- RoHS compliant
- Compatible With All IEEE pre 802.3af, 802.3at and Legacy Powered Devices
- Input voltage:90Vac~264Vac
- Support 300Vac input for long time work
- Output over current protection
- Short circuit protection
- MTBF \geq 1,000,000 hrs
- Surge protection
- CE mark
- WEEE compliant



Description


Hikvision POE midspan is designed to extract power from a conventional twisted pair Category 5 Ethernet cable, conforming to the IEEE 802.3at Power-over-Ethernet (PoE) standard.

The converter signature and control circuit provides the PoE compatibility signature and power classification required by the Power Sourcing Equipment (PSE) before applying up to 60W power to the port.

| Model | LAS60-57CN-RJ45 |
|-------------------------|---|
| Input Current | 2A |
| Output Voltage Range | 54V~57V |
| Output Power | 60W |
| Pass Through Data Rates | 10/100/1000 Mbps |
| Ports | Two 10/100/1000M adaptive RJ45 ports, one is DATA/IN, another is PoE/DATA |
| LED Indicator | Power & PoE Status(The module operates normally when MID and END are on) |
| Base Function | Compliance to IEEE 802.3 at/af Standard for PD |
| Network Medium | 10BASE-T: unshielded twisted pair category 3, 4 or 5 100BASE-TX: unshielded twisted pair category 5 and above 1000BASE-TX: unshielded twisted pair category 5 and above |
| Protection Methods | Output Over Current Protection, Short Circuit Protection |

| | |
|-----------------------|---------------------------|
| Operating Humidity | 5% ~ 90% |
| Weight | 473g |
| Dimension | 185mm*70.8mm*37mm (L*W*H) |
| Operating Temperature | -20 ~ 60 °C |

Dimensions

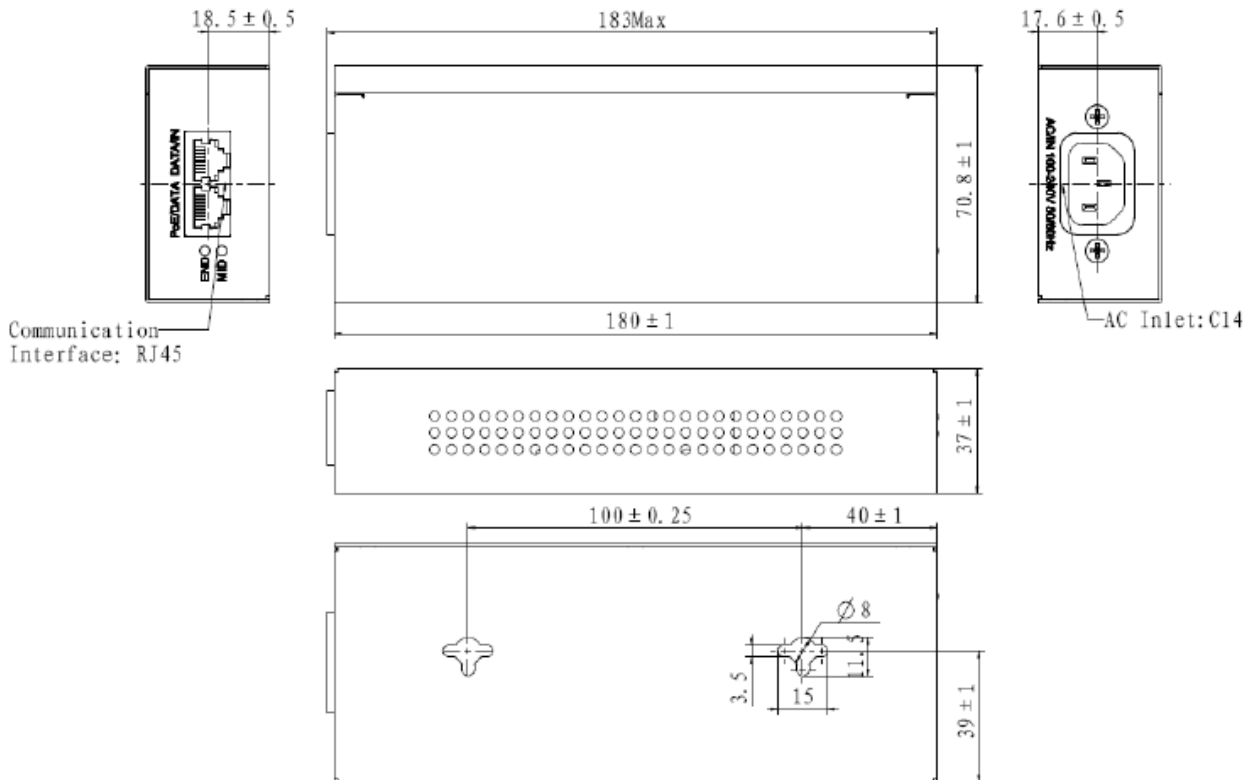

ORDERING INFORMATION

104-709 Hikvision 60W Hi-PoE INJECTOR



Innovative Electronic Solutions
www.ness.com.au



NSW Ph 02 8825 9222 sales@ness.com.au | VIC Ph 03 9875 6400 nessmelb@ness.com.au | QLD Ph 07 3399 4910 nessbris@ness.com.au | WA Ph 08 9328 2511 nessper@ness.com.au | SA Ph 08 8152 0000 adelaide@ness.com.au