

**DS-KAD606-P
Video/Audio Distributor**

104-833B

Key Features


- 8 RJ-45 interfaces, including 6 adaptive 10/100 Mbps LAN interfaces supporting network cable powering and 2 adaptive 10/100 Mbps cascading LAN interfaces
- 6 adaptive 10/100 Mbps LAN interfaces supports providing 24 VDC for video intercom devices
- IEEE802.3, IEEE802.3u, IEEE802.3x
- Storing and forwarding function
- Over 1000,000 h mean time between failure

Note:

24V DC power adapter is included in the package.




Typical Application

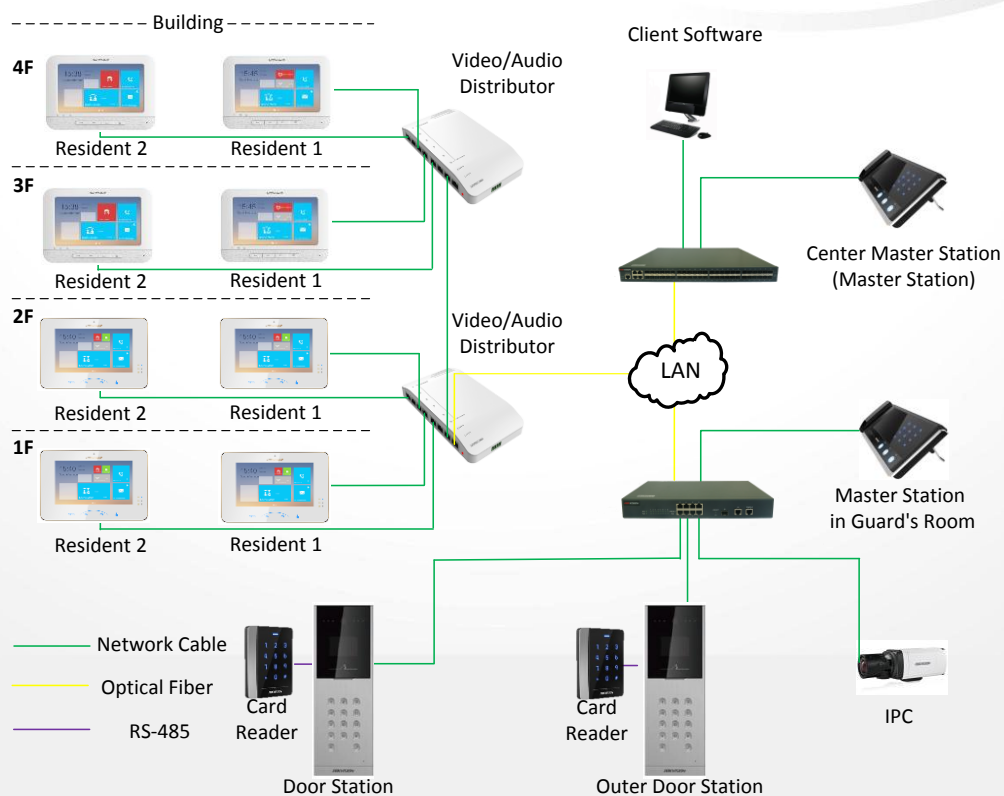

Specifications

Model		DS-KAD606-P
Network parameters	Interface number	Eight 10/100 Mbps Interfaces
	Interface type	RJ-45, Full/Half-Duplex, MDI/MDI-X Self-Adaptive
	Standard	IEEE802.3, IEEE802.3u, IEEE802.3x
	Processing type	Storing and Forwarding
	Flow control	IEEE802.3x (Full-Duplex), Back Pressure (Half-Duplex)
	Priority queue	Four
	Max. VLAN	64
	VLAN ID No.	VID1 to VID4094
	MAC address list	8K
	Internal buffer	1 Mbit
General	Power supply	24 VDC (24V DC Power Adapter included)
	Power consumption	≤8 W
	Working temperature	-10° C to 55° C (14° F to 131° F)
	Working humidity	10% to 90%, No Condensation
	Dimensions (L × W × H)	176 mm × 91 mm × 32 mm (69.3" × 35.8" × 12.6")

Physical Interfaces

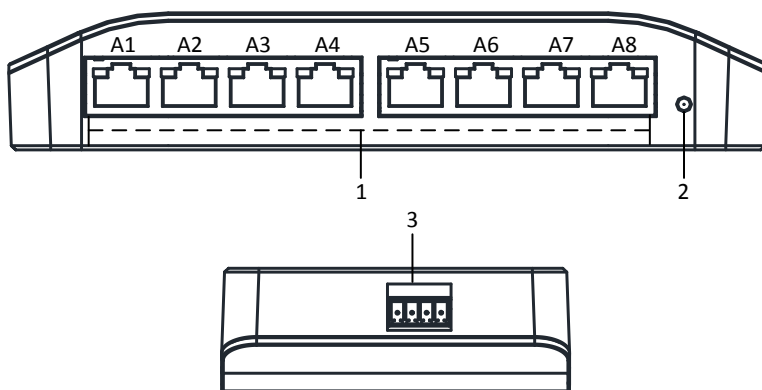

Index	Description
1	8 RJ-45 Interfaces
2	Power Indicator
3	24 VDC, Power Socket

Notes:

- Interfaces (A1, A2, A3, A4, A5, and A6) are 6 adaptive 10/100 Mbps LAN interfaces supporting network cable powering.
- Interfaces (A7 and A8) are 2 adaptive 10/100 Mbps cascading LAN interfaces.

ORDERING INFORMATION

104-833B

Hikvision DS-KAD606-P Video Intercom Video/Audio Distributor



Innovative Electronic Solutions
www.ness.com.au



NSW Ph 02 8825 9222
sales@ness.com.au

VIC Ph 03 9875 6400
nessmelb@ness.com.au

QLD Ph 07 3399 4910
nessbris@ness.com.au

WA Ph 08 9328 2511
nessper@ness.com.au

SA Ph 08 8152 0000
adelaide@ness.com.au