


**DS-PDCM15PF-IR
Camera Module**

114-134



Camera module that works with our newly released wireless outdoor Tri-tech detector, built-in CMOS high quality color camera that provide you an ideal solution for video verification, both users and CMS can verify alarms day and night by viewing real-time images captured by this camera module for fast and accurate response to real alarm events

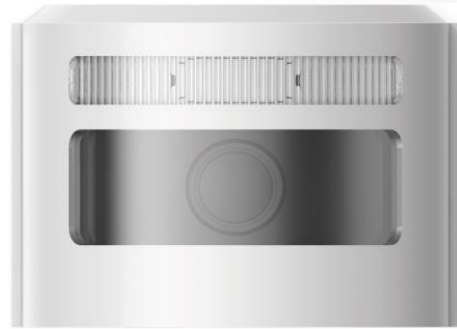

- 1/2.7" Progressive Scan CMOS
- 2.0 mm fixed lens
- 3D Digital Noise Reduction
- Easy Installation
- The direction of the Angle can be adjusted to fit the TT Detector's Angle
- Protection Level IP66

▪ Specification

Detection Performance	
Detection Method	Video Verification
Feature	
Digital Noise Reduction	3D
Focal length	2.0mm@F2.25
Video	
Field Angle	137.2°(H), 80.1°(V)
Image Type	JPEG
Resolution	640*480,320*240,160*120
Fill Light	Infrared Light
Fill Range	15m
Day/Night Switch	Auto
Interface	
Communication Interface	1 12-Bit Data Interface
Electrical Characteristics	
Power Supply	3 VDC
Power Consumption	1200mA
General	
Operation Temperature	-25 °C to 60 °C (-13 °F to 140 °F)
Storage Temperature	-25 °C to 60 °C (-13 °F to 140 °F)
Operation Humidity	10% to 90%
IP Rate	IP66
Dimension(WxHxD)	74.1mm x 72.35mm x 53mm
Weight	155g

▪ Accessory

▪ Optional

DS-PDTT15AM-L M-WB	DS-PDTT15AM-L M-WE
	

ORDERING INFORMATION

114-134 Hikvision DS-PDCM15PF-IR RF Camera Module



Innovative Electronic Solutions
www.ness.com.au



NSW Ph 02 8825 9222
sales@ness.com.au

VIC Ph 03 9875 6400
nessmelb@ness.com.au

QLD Ph 07 3399 4910
nessbris@ness.com.au

WA Ph 08 9328 2511
nessper@ness.com.au

SA Ph 08 8152 0000
adelaide@ness.com.au