

**DS-D5022F2-1V2S**  
**21.5 inch FHD VA 100 Hz speaker**

114-285D



- 100 Hz refresh rate, more fluid and life-like video
- Ultra-thin device body with ultra-thin border for 3 sides.
- 8 bit LVDS FHD (1920 × 1080) display.
- Low blue light design for eye care.
- Multiple interfaces, including VGA, HDMI, audio out, and built-in speaker.
- Support VESA wall mount.

## ▪ Specification


Display	
Screen Size	21.45 inch
Active Display Area	478.656 (H) mm × 260.280 (V) mm
Resolution	1920 × 1080
Backlight	E-LED
Pixel Pitch	0.241 (H) mm × 0.241 (V) mm
Brightness	250 cd/m <sup>2</sup>
Viewing Angle	178° (H)/178° (V)
Color Depth	8 bit, 16.7 M
Contrast Ratio	4000:1
Response Time	8 ms
Refresh Rate	Max. 100 Hz, Typ. 60 Hz
Haze	Haze 25%, 3H
Reliability	7 × 24 H
Color Gamut	72% NTSC
Interface	
Video & Audio Input	HDMI 1.4 × 1, VGA × 1, Audio In × 1
Video & Audio Output	Speaker × 2 ( 4 Ω 2 W)
Power	
Power Supply	DC 12 V, 2.0 A
Power Consumption	≤ 24 W
Standby Consumption	≤ 0.5 W
Working Environment	
Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
Working Humidity	20% RH to 90% RH (Non-Condensing)
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Storage Humidity	10% RH to 90% RH (Non-Condensing)
General	
Casing Material	Plastic
VESA	75 mm × 75 mm (4 - M4 × 6 mm)
Bezel Width	2.38 mm (top/left/right), 21.55 mm (bottom)
Product Dimensions (W × H × D)	With base: 493.26 (W) mm × 393.45 (H) mm × 185.74 (D) mm (19.42" × 15.49" × 7.31") Without base: 493.26 (W) mm × 290.13 (H) mm × 42.35 (D) mm (19.42" × 11.42" × 1.67")
Package Dimensions (W × H × D)	599 (W) mm × 393 (H) mm × 109 (D) mm (23.58" × 15.47" × 4.29")
Net Weight	2.0 ± 0.5 kg (4.41 ± 1.10 lb.)
Gross Weight	3.2 ± 0.5 kg (7.05 ± 1.10 lb.)
Packing List	Monitor × 1, Base component × 1, Power adapter (12 V, 2.0 A) × 1, HDMI cable (1.5 m) × 1, User manual × 1, Multilingual manual × 1
Remarks	The base is included by default. The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information

## Physical Interface

Interface	Description	Interface	Description
HDMI	HDMI 1.4 digital signal input interface	VGA	VGA analog signal input interface
Audio In	3.5 mm audio input interface	DC	DC 12 V 2.0 A input interface



## Dimension

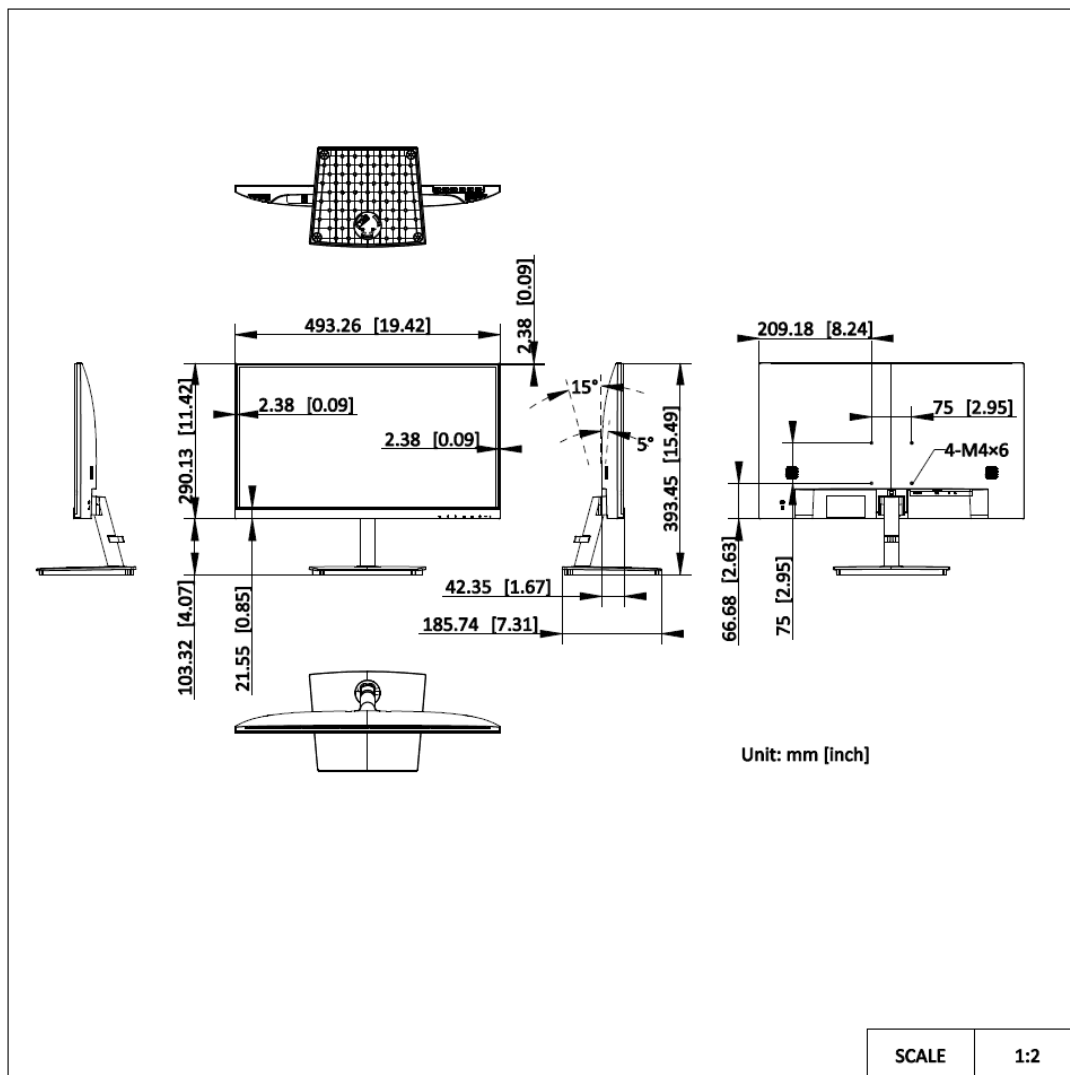

## ORDERING INFORMATION

114-285D

Hikvision DS-D5022F2-1V2S 22" Monitor with speakers



Innovative Electronic Solutions  
www.ness.com.au



**NSW** Ph 02 8825 9222  
sales@ness.com.au

**VIC** Ph 03 9875 6400  
nessmelb@ness.com.au

**QLD** Ph 07 3399 4910  
nessbris@ness.com.au

**WA** Ph 08 9328 2511  
nessper@ness.com.au

**SA** Ph 08 8152 0000  
adelaide@ness.com.au