

DS-D5B65RB/B

Conference Flat Panel

114-478



The conference flat panel (hereafter referred to as the “device”) integrates functions of computers, projectors, interactive whiteboards, sound boxes, cameras, bluetooth remote control (optional), HDTVs, advertising machines, etc. The device integrates technologies like 4K display, infrared touch, human-machine interaction, multi-media information processing, and network transmission, and provides users with various features such as writing, annotating, multi-screen sharing, pen detection, and remote video call (optional). The device is mainly used for remote video conferences, trainings and guidance, medical consulting, as well as other events in kinds of offices, meeting rooms, multi-media classrooms, exhibition halls and so on.

- **4K Display Presenting More Details**

4K resolution improves the image details with the features of being anti-glared, fingerprint-resistant, and strong light-blocked.

- **Instant and Ultra-Fine Writing**

Provides smooth writing with the touch precision of 1 mm, and smart stroke optimization makes every stroke more real.

- **One-touch Sharing for Meeting**

Annotation sharing by QR code or e-mail ensures more concentrations and higher efficiency.

- **Free Annotating Without Boundaries**

Built-in application enables free annotations and instant saving on any interfaces. The whiteboard system can register up to 20 simultaneous touch points, showing different opinions at the same time.

- **Wireless Screen Mirroring**

Wireless screen mirroring through laptop, desktop PC, mobile phone, and tablet with no need to connect cables. Convenient solution comparison thanks to screen split by half and by quarter.

- **Corporate Working Without Distance Limit**

Video conferencing available through relative software and hardware, making remote cooperation achievable. Multi-screen interaction in large-scale scenarios with synchronized displaying of writing.


- **Built-in 8 MP camera ensures clearer images, and 6 microphone arrays present you an immersive experience.**

▪ Specification

Model		DS-D5B65RB/B
Product Model	Product Model	DS-D5B65RB/B
Display	Screen Size	65 inch LED Backlight
	Backlight	DLED
	Pixel Pitch	0.124 (H) × 0.372(V) mm
	Resolution	3840 × 2160@60 Hz
	Brightness	350 cd/m ²
	Viewing Angle	178°(H)/178°(V)
	Color Depth	10 bit
	Contrast Ratio	1200:1(Typ.)
	Response Time	6 ms
	Refresh Rate	60 Hz
	Color Gamut	90% NTSC(CIE1931)(Typ.)
Built-in System	Operation System	Android 8.0
	Processor	4-core A73 × 2 + A53 × 2, 1.5 GHz
	Memory	3 GB
	Built-In Storage	32 GB
	NIC	Built-in 100 Mbps NIC, supporting routing
Touch	Type	Infrared touch screen
	Glass	Smooth tempered glass being anti-glare and explosion-proof
	Touch Point	20 point multi-touch
	Touch Response Time	< 10 ms
	Touch Precision	± 1 mm (≥ 90% touching area)
	Optical Bonding	Support
Interface	Video & Audio Input	HDMI IN × 2, MAX 4K@60 Hz, LINE IN × 1
	Video & Audio Output	HDMI OUT × 1, MAX 4K@60 Hz, LINE OUT × 1
	Network Interface	RJ45 (100 Mbps port) × 2
	Data Transmission Interface	USB on front panel × 2, USB on rear panel × 2, touch USB × 1
	Control Interface	RS-232 × 1
Internal Function	Loudspeaker	Built-in 2 × 16 W loudspeaker
	Bluetooth	Built-in BLE (Bluetooth Low Energy) module supports Bluetooth 5.0 and previous version.
Power	Power Consumption	≤ 250 W (full load)
	Standby Consumption	0.5 W
Working Environment	Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Working Humidity	10% to 90% RH
General	Power Supply	100 to 240 VAC, 50/60 Hz
	Product Dimensions (W × H × D)	1507 × 930 × 86 mm (59.3" × 36.6" × 3.4")
	Package Dimensions (W × H × D)	1687 × 1061 × 234 mm (66.4" × 41.8" × 9.2")
	Net Weight	40.36 kg (88.98 lb.)



	Gross Weight	50.69 kg (111.75 lb.)
Camera	Pixel	8 MP
	Camera Function	Smart switch between Android system and OPS
	Field Angle	100 °(diagonal), 90°(horizontal), 66°(vertical)
	Distortion	≤1%
	Camera Resolution Ratio	Up to 4K
Microphone	Specification	Omni-directional 6-array layout
	Mic Function	Echo reduction and smart noise-cancellation
	Sound-Pickup Distance	8 m
	Sampling Rate	32 K
	Mic Sampling Rate	16 bit

Physical Interface

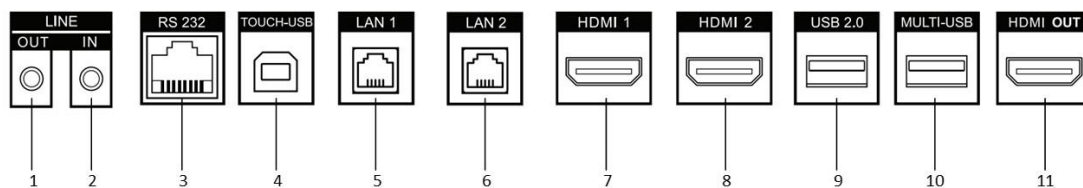

Interface	Description	Interface	Description
1.LINE OUT	Audio output interface	2.LINE IN	Audio input interface
3.RS-232	RS-232 serial port	4.TOUCH-USB	Peripheral touch interface
5.LAN 1	Ethernet interface 1	6. LAN 2	Ethernet interface 2
7.HDMI 1	HDMI input interface 1	8.HDMI 2	HDMI input interface 2
9.USB 2.0	USB 2.0 interface	10.MULTI-USB	Multi-functional USB interface
11.HDMI OUT	HDMI output interface		

▪ Dimension

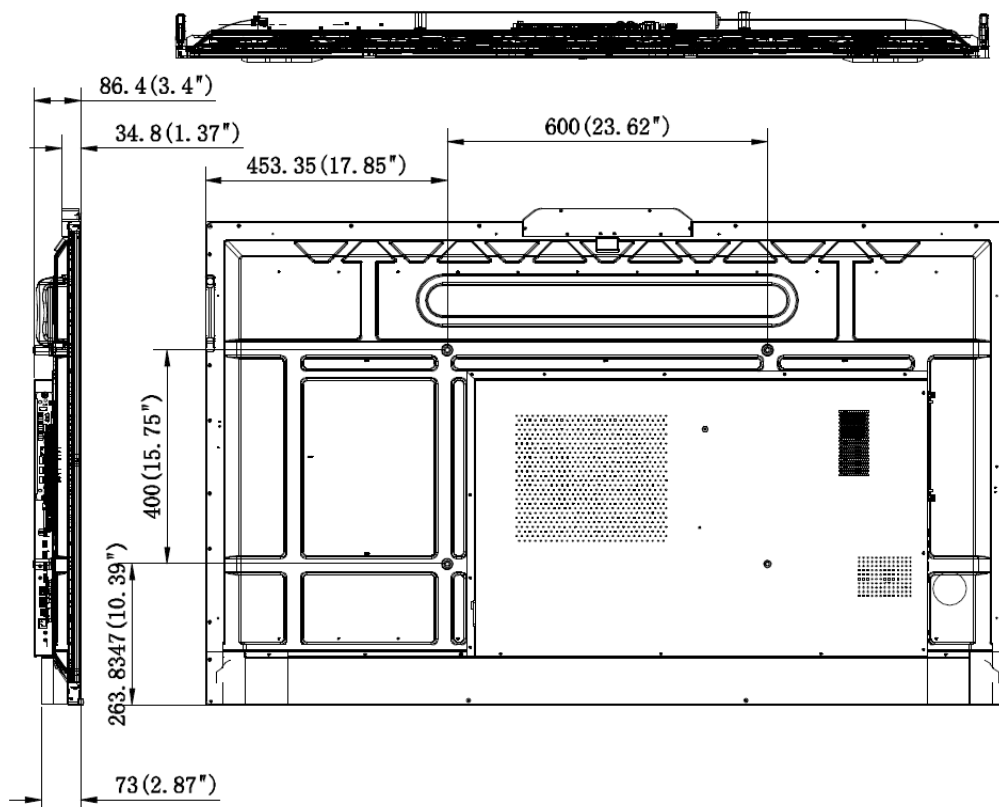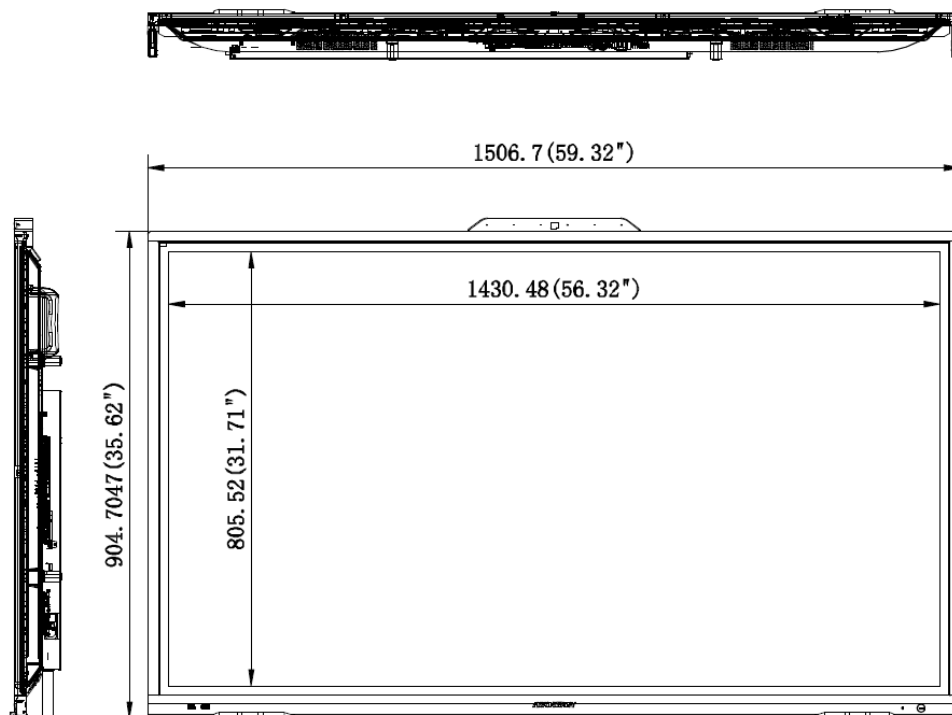



ORDERING INFORMATION

114-478 Hikvision DS-D5B65RB/D 65" Smart interactive screen



Innovative Electronic Solutions
www.ness.com.au



NSW Ph 02 8825 9222 sales@ness.com.au	VIC Ph 03 9875 6400 nessmelb@ness.com.au	QLD Ph 07 3399 4910 nessbris@ness.com.au	WA Ph 08 9328 2511 nessper@ness.com.au	SA Ph 08 8152 0000 adelaide@ness.com.au
--	--	--	---	---