

DS-KAD706Y


114-656

Key Feature

- 2-wire IP distributor
- 6 2-wire cascade interfaces with device power supply
- 2 cascade interfaces for DS-KAD706Y / DS-KAD706Y-S
- 8 interface indicators, 1 RJ-45 Interface, 1 Reset button
- Din rail mounting, 24VDC



Dimension

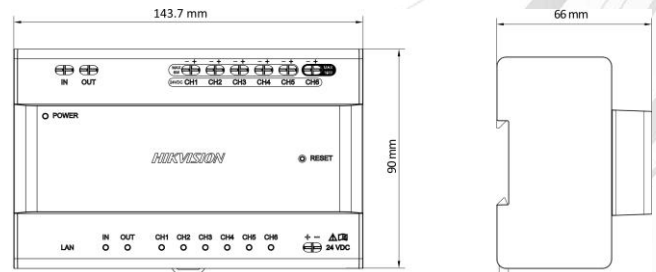

Specification

Device interfaces

Network interface	1 RJ45
Two-wire interface	8 (2 for casacading, 6 for devices)
Signal indicator	8
Power indicator	1
Reset	1

General

Power supply	24 VDC
Power consumption	CH1 to CH5 < 6 W, CH6 < 16 W
Working temperature	-10 ° C to 55 ° C (14 ° F to 131 ° F)
Working humidity	10% to 90%

ORDERING INFORMATION

114-656

Hikvision DS-KAD706Y-P 2-Wire 6 Port Distributor inc Power Supply



Innovative Electronic Solutions
www.ness.com.au



NSW Ph 02 8825 9222
sales@ness.com.au

VIC Ph 03 9875 6400
nessmelb@ness.com.au

QLD Ph 07 3399 4910
nessbris@ness.com.au

WA Ph 08 9328 2511
nessper@ness.com.au

SA Ph 08 8152 0000
adelaide@ness.com.au