

DS-UPS3000 UPS

114-694



- Built-in AVR
- Super fast charging
- Wide input voltage range
- Overload protection
- Short circuit protection
- Surge protection
- USB port for remote control
- LCD display


▪ Specification


Power	
UPS Capacity	3000 VA / 1800 W
Input	
Input Voltage Range	140 VAC to 290 VAC
Input Frequency	50/60 Hz self-adaptive
Plug Type	Schuko
Output	
Output Voltage Range	210 VAC to 235 VAC
Output Frequency	50/60 Hz \pm 0.5 Hz self-adaptive
Transfer Time	\leq 10 ms
Waveform	PWM
Outlet Type	Universal
Outlet Number	4
Battery	
Battery Type	12 V/9 Ah *4 pcs, lead-acid battery
Recharge Time	6-8 hours recover to 90% capacity
Typical Backup Time	Run time at 100w: 150 min Run time at 600w: 15 min Run time at 900w: 6 min
Interface	
Communicate Ports	USB
Protection	
Full Protection	Surge protection, Overload protection, Discharge protection, Short circuit protection
Indicator	
Display	LCD Screen Input Voltage, Output Voltage, Battery capacity, load level
Alarm	Charging Mode (DC mode): Sounding every 8 seconds Low Battery: Sounding every second Overloading Mode: Sounding every 0.5 seconds Fault: Continuously sounding
General	
Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
Operating Humidity	30% to 90% (non-condensing)
Dimension	412 mm \times 145 mm \times 210 mm (16.22" \times 5.71" \times 8.27")
Weight	Approx. 18.5 kg (40.8 lb)

▪ Available Model

DS-UPS3000

▪ Dimension

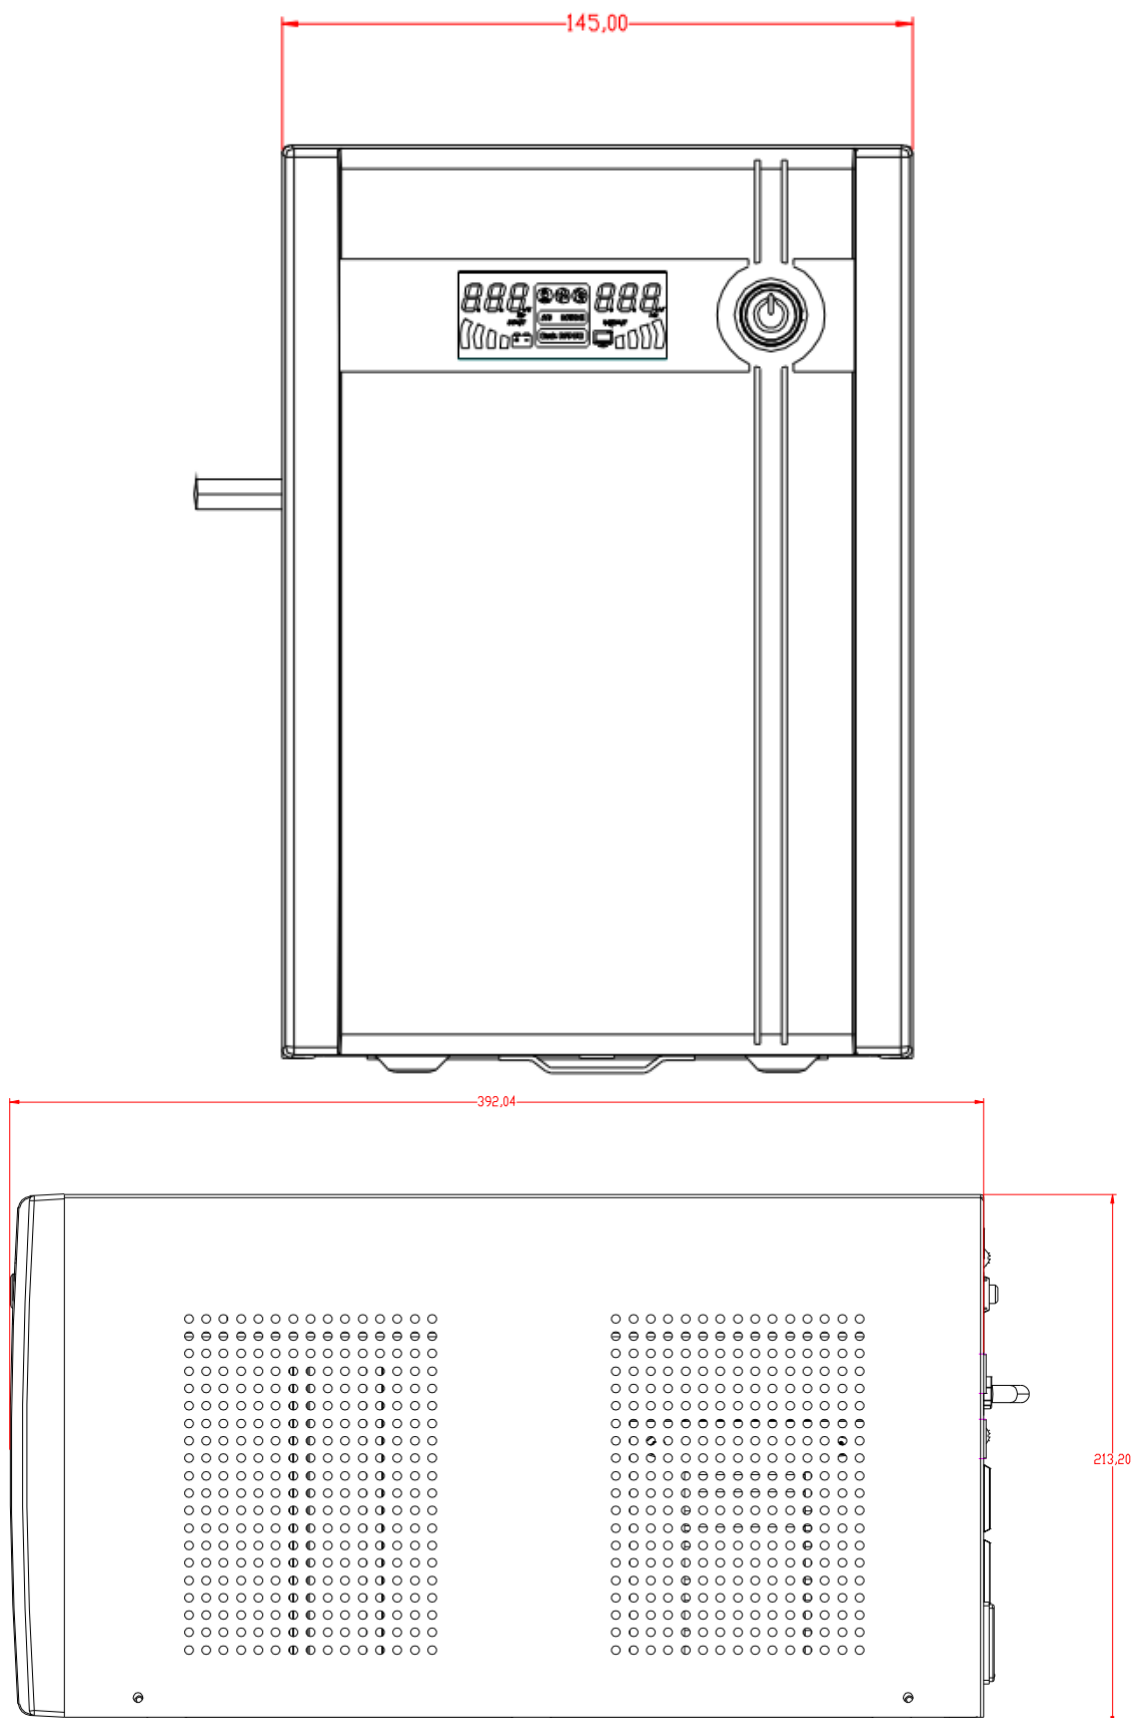

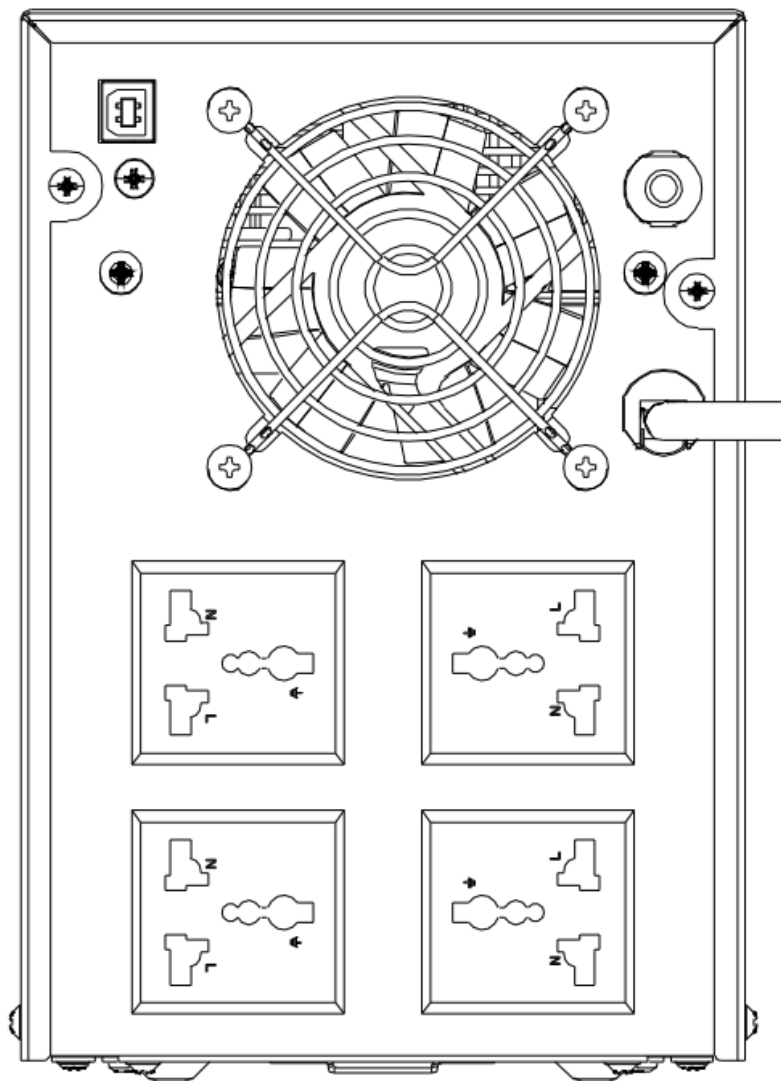

ORDERING INFORMATION

114-694 Hikvision DS-UPS3000-AU 3000VA UPS



Innovative Electronic Solutions
www.ness.com.au



NSW Ph 02 8825 9222
sales@ness.com.au

VIC Ph 03 9875 6400
nessmelb@ness.com.au

QLD Ph 07 3399 4910
nessbris@ness.com.au

WA Ph 08 9328 2511
nessper@ness.com.au

SA Ph 08 8152 0000
adelaide@ness.com.au