

New Android Indoor Station

DS-KH9570-WTE1

One panel, full control



Unified Control Hub

Alarms · Network Cameras · Elevator Access
Support Third-party APK Installation through Web



Ultra Smooth Operation

Android 14 OS | 4-core Processor | 4 GB RAM+8GB ROM



Super HD Clarity

10.1" OPSTouch Display | 1920x1200 Resolution




Real Talk Anytime

Dual Microphones & Speakers | AI Noise Reduction

HIKVISION[®]

DS-KH9570-WTE1/S 9 Series Indoor Stations

114-245C

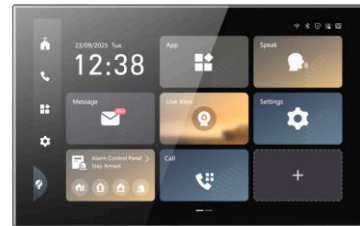

- Integrated Smart Security Unified security management on single screen
- Ultra Smooth Operation: • 4-core processor • Android 14 • Up to 4 GB RAM + 8 GB ROM
- Super HD Clarity: • 10.1" IPS touch display • 1920×1200 resolution
- Real Talk Anytime: • Dual microphones & speakers • Noise suppression and echo cancellation

▪ Specification


System parameters	
Operation system	Android 14
ROM	8 GB
RAM	4GB
Processor	Embedded high performance processor
Display parameters	
Screen size	10.1-inch
Operation method	Capacitive touch screen
Type	Colorful IPS
Resolution	1920 ×1200
Video parameters	
Lens	/
Resolution	/
Video compression standard	/
Audio parameters	
Audio input	2 built-in omnidirectional microphone
Audio compression standard	G.711A, G.711U, G.722.1, G726, Opus, AAC, AAC_LD
Audio output	2 built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Linked doorphone capacity	17
Message capacity	200 captured pictures, 200 alarm records, 200 unlock records, 200 temper records
Linked indoor extensions capacity	15
Linked network camera capacity	16
Network parameters	
Wi-Fi	Wi-Fi 6, 2.4 GHz & 5GHz
Bluetooth	BLE 5.0
Network protocol	IPv4, SIP, HTTP, HTTPS, DNS, RTSP, RTP, TCP, UDP, ICMP, DHCP, ARP SIP v1 (RFC2543), SIP v2 (RFC3261) DTMF: SIP Info SADP, ISAPI, ONVIF
Device interfaces	
Alarm input	8 (Reserved)
Network interface	1 RJ-45 10/100 Mbps self-adaptive
RS-485	1 RS-485 (Half duplex)
TF card	Support TF card, up to 256 G
Power supply input	12 VDC
Power supply output	12 VDC, 200mA
Relay	1 (Reserved), Max. 30VDC 1A
General	
Proximity Sensor	Distance: 50cm, Horizontal: 25°, Vertical: 25°
Installation	Surface mounting

Weight	Without package: 545 g (1.2 lb),With package: 639g (1.41 lb)
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Working humidity	10% to 90% (no-condensing)
Power supply	12 VDC, 2.5 A; IEEE 802.3at, Standard PoE
Application environment	Indoor
Power consumption	≤ 24 W
Language	English, Arabic, French, Russian, Spanish, Spanish (Latin America), Italian, German, Polish, Turkish, Portuguese, Portuguese (Brazil), Uzbek, Kazakh, Czech, Hungarian, Dutch, Romanian, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Lithuanian, Estonian, Latvian, Norwegian, Danish, Slovenian, Slovak, Hebrew, Swedish, Finnish, Mongolian, Vietnamese, Traditional Chinese
Dimension (W × H × D)	246.58 mm × 155.76 mm × 23.62 mm (9.71" × 6.13" × 0.93")

▪ Available Model

DS-KH9570-WTE1/S

▪ Dimension

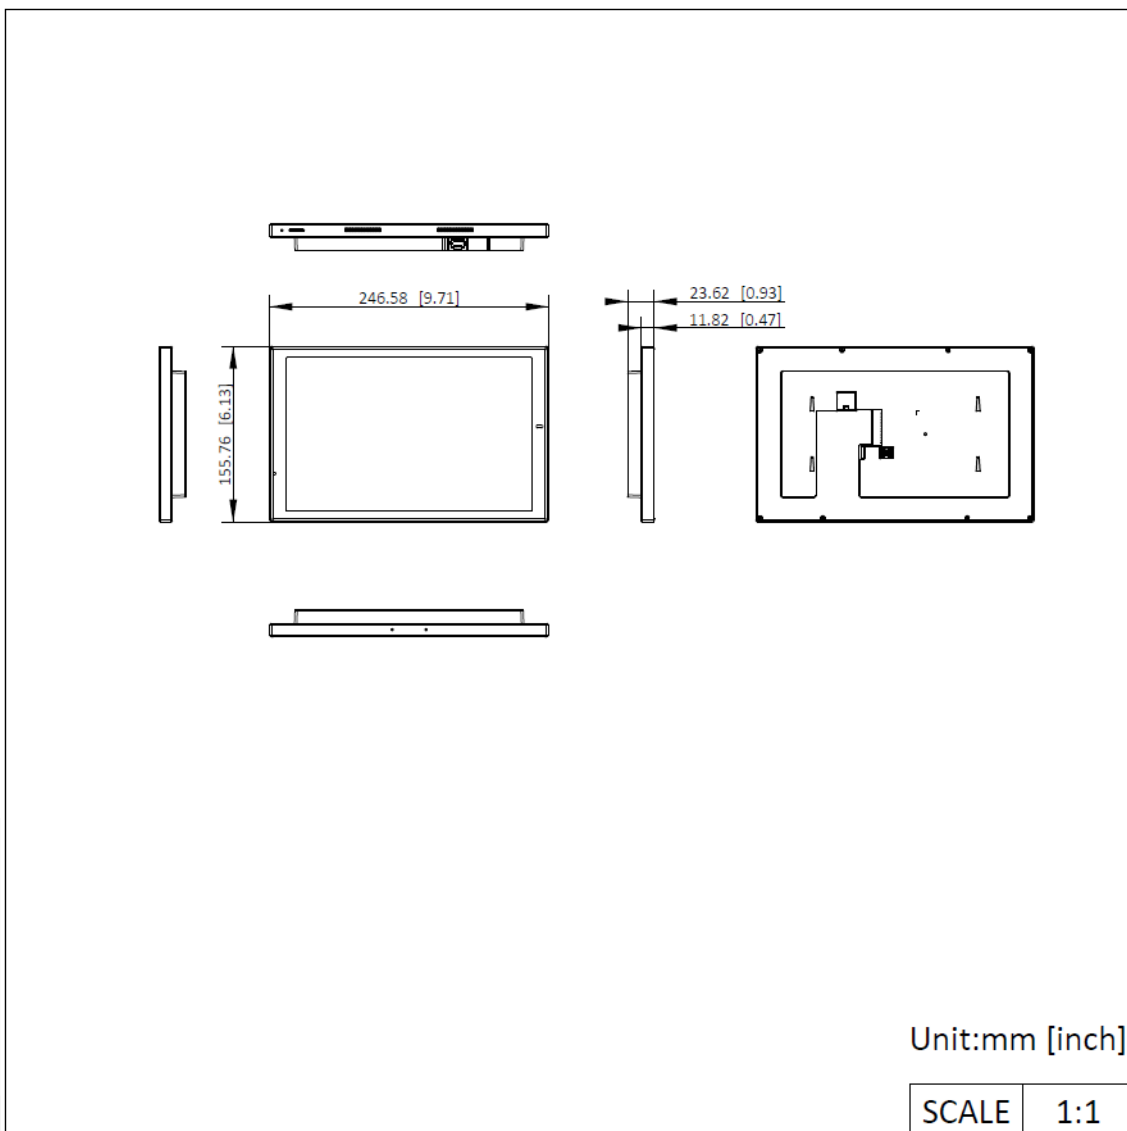

- Accessory
- Optional

DS-KABH8380-T

