

DS-KD8003-IME1/NS
Video Intercom Module Door Station

114-401



- Modular door station Main unit, needs mounting bracket
- 2 MP HD Camera, Fish eye, IR Supplement
- 2 lock relays, 4-ch alarm input
- IP65, 12 VDC or standard PoE
- Video intercom to indoor station and main station

▪ Specification


System parameters	
Operating system	Embedded Linux operation system
ROM	16 MB
RAM	256 MB
CPU	Embedded MCU Processor
Display parameters	
Screen size	/
Operation method	/
Type	/
Resolution	/
Video parameters	
Lens	Low Illumination 2 MP HD IR Camera
Resolution	Main stream : 1920 × 1080 Sub stream : 720 × 480
FOV	Horizontal: 180°, Vertical: 96°
WDR	Supported
Supplement light	IR supplement
Video compression standard	H.264
Audio parameters	
Audio compression standard	G.711 U
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker (More than 85 dB within 20 cm)
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
User capacity	/
Face capacity	/
Card capacity	/
Linked network camera capacity	100
Holiday group	16
Network parameters	
Communication protocol	TCP/IP, RTSP
Wired network	Support
Wi-Fi standard	/
Bluetooth version	/
3G/4G standard	/
Device interfaces	
Alarm input	4
Network interface	1 10/100 Mbps self-adaptive Ethernet
TAMPER	1
Exit button	2
RS-485	1
USB	/

Wiegand	/
TF card	/
Alarm output	2
Lock control	2
Door contact input	2
Power interface	1
Performances	
Multi-factor authentication	/
General	
Button	/
Installation	Flush mounting, surface mounting
Indicator	/
Weight	Without package: 415 g With package: 625 g
Protective level	IP65
Working temperature	-40° C to +55° C (-40° F to 131° F)
Working humidity	10% to 95%
Dimensions	98 mm × 99.8 mm × 43.9 mm (3.86" × 3.93" × 1.73")
Battery	/
Power supply	IEEE802.3af, standard PoE 12 VDC, 1 A
Application environment	Outdoor
Power consumption	≤10 W
Language	English, French, Portuguese (Brazil), Spanish, Russian, German, Italian, Polish, Arabic, Turkish, Vietnamese, Hungarian, Dutch, Romanian, Czech, Bulgarian, Ukrainian, Croatian, Serbian, Portuguese, Slovak

▪ Available Model

DS-KD8003-IME1/NS

▪ Dimension

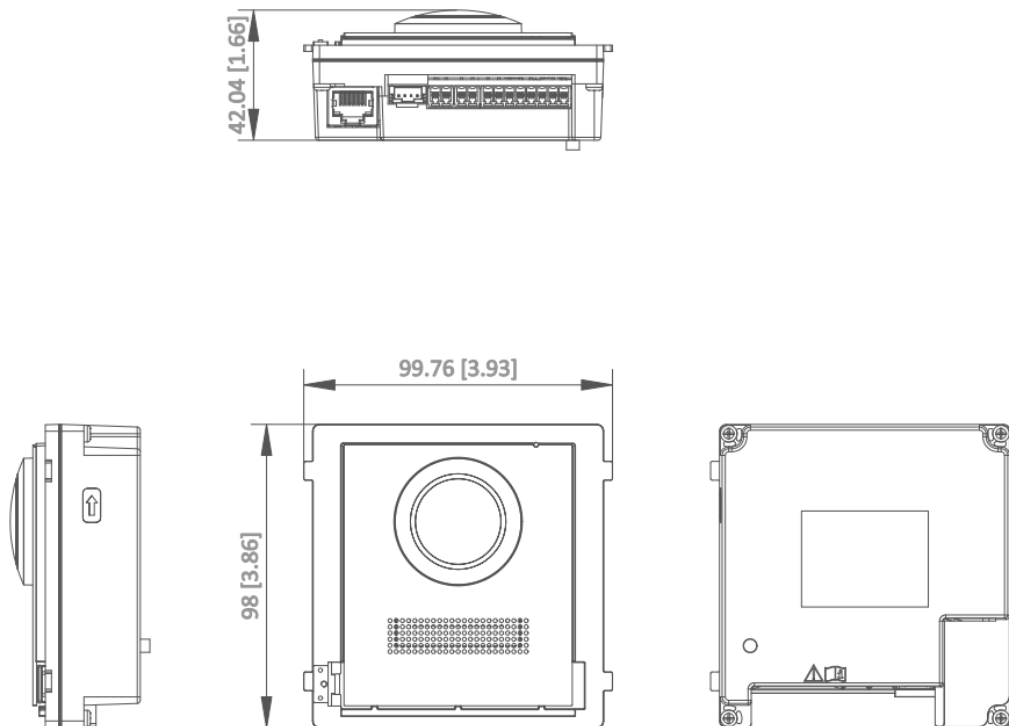

Unit:mm [inch]

SCALE 1:1

▪ Accessory

▪ Optional

DS-KIS602 Video Intercom KIT	DS-KD-ACW1 2nd Video Intercom Brackets	DS-KD-ACF1 2nd Video Intercom Brackets	DS-KD-ACW2 2nd Video Intercom Brackets	DS-KD-ACW3 2nd Video Intercom Brackets
				

DS-KD-ACF2 2nd Video Intercom Brackets	DS-KD-ACF3 2nd Video Intercom Brackets	DS-KA01-ZX-10 Demo Kit with 2nd video intercom	DS-KABD8003-RS1 Rain Shield of Module Door Station	DS-KABD8003-RS2 Rain Shield of Module Door Station
				
DS-KABD8003-RS3 Rain Shield of Module Door Station	DS-KD-ACF1/S 2nd Video Intercom Brackets	DS-KD-ACF2/S 2nd Video Intercom Brackets	DS-KD-ACF3/S 2nd Video Intercom Brackets	DS-KD-ACW1/S 2nd Video Intercom Brackets
				
DS-KD-ACW2/S 2nd Video Intercom Brackets	DS-KD-ACW3/S 2nd Video Intercom Brackets	DS-KIS602/S#Europe Video Intercom KIT	DS-KIS602/S#EUROPE Video Intercom KIT	DS-KDE-ACR3 Video Intercom Brackets
				
DS-KD-ACF1#EU 2nd Video Intercom Brackets	DS-KD-ACF2#EU 2nd Video Intercom Brackets	DS-KD-ACF3#EU 2nd Video Intercom Brackets	DS-KD-ACW1#EU 2nd Video Intercom Brackets	DS-KD-ACW2#EU 2nd Video Intercom Brackets
				

DS-KD-ACW3#EU
2nd Video Intercom
Brackets



Innovative Electronic Solutions
www.ness.com.au



NSW Ph 02 8825 9222
sales@ness.com.au

VIC Ph 03 9875 6400
nessmelb@ness.com.au

QLD Ph 07 3399 4910
nessbris@ness.com.au

WA Ph 08 9328 2511
nessper@ness.com.au

SA Ph 08 8152 0000
adelaide@ness.com.au