

DS-UPS2000-R UPS

114-693B



- Built-in AVR
- Super fast charging
- Wide input voltage range
- Overload protection
- Short circuit protection
- Surge protection
- USB port for remote control
- LCD display





▪ Specification

| Power | |
|-----------------------|--|
| UPS Capacity | 2000 VA / 1200 W |
| Input | |
| Input Voltage Range | 162 VAC to 268 VAC (220V) 170 VAC to 280 VAC (230V) 177 VAC to 290 VAC (240V) |
| Input Frequency | 50/60 Hz self-adaptive |
| Plug Type | Schuko |
| Output | |
| Output Voltage Range | 220/230VAC ± 10% |
| Output Frequency | 50/60 Hz ± 0.5 Hz self-adaptive |
| Transfer Time | ≤ 10 ms |
| Waveform | Simulated Sine wave |
| Outlet Type | Schuko |
| Outlet Number | 4 |
| Battery | |
| Battery Type | 12 V/9 Ah x 2 , lead-acid battery |
| Recharge Time | 6-8 hours recover to 90% capacity |
| Typical Backup Time | Run time at 300w: 15-20 min |
| Interface | |
| Communicate Ports | USB |
| Protection | |
| Full Protection | Surge protection, Overload protection, Discharge protection, Short circuit protection |
| Indicator | |
| Display | LCD Screen AC Mode, Battery Mode, Load Level, Battery Level, Input Voltage, Output Voltage, Overload, Fault, and Battery Low |
| Alarm | Battery mode: Sounding every 10 seconds. Low battery : Sounding every second. Over load : Sounding every 0.5 seconds. Fault: Continuously sounding. |
| General | |
| Operating Temperature | 0 °C to 40 °C (32 °F to 104 °F) |
| Operating Humidity | 0% to 90% (non-condensing) |
| Dimension | 124 mm × 382.42 mm × 225.1 mm (4.88" × 15.06"× 8.86") |
| Weight | Approx. 10.5 kg (23.15 lb) |

▪ Available Model

DS-UPS2000-R

▪ **Dimension**

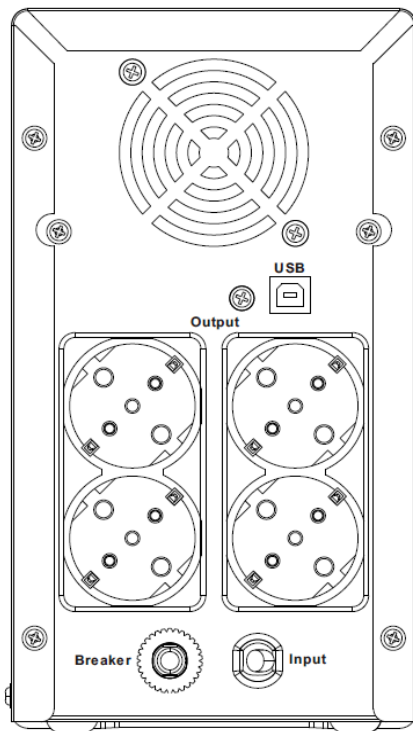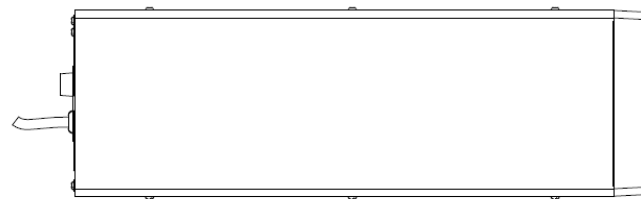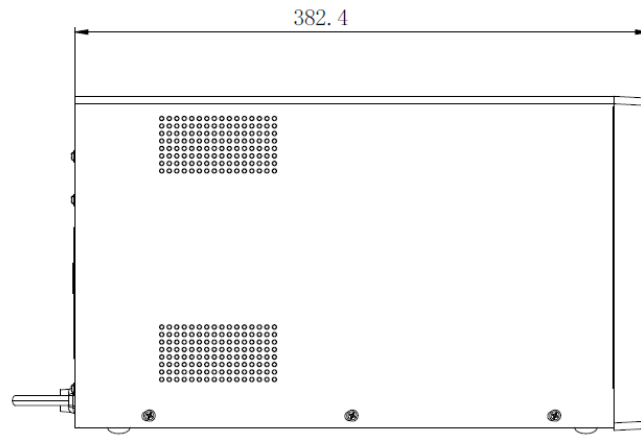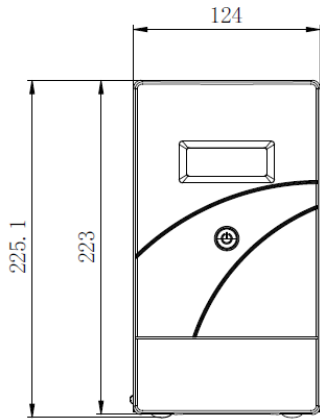

Innovative Electronic Solutions
www.ness.com.au



NSW Ph 02 8825 9222
sales@ness.com.au

VIC Ph 03 9875 6400
nessmelb@ness.com.au

QLD Ph 07 3399 4910
nessbris@ness.com.au

WA Ph 08 9328 2511
nessper@ness.com.au

SA Ph 08 8152 0000
adelaide@ness.com.au

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

