


HA-AC-S1/HiLook Access control Terminal

114-851

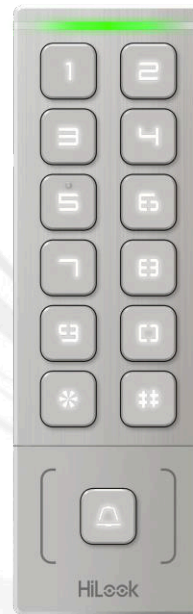

- Slim and flexible design with metal.
- Max. 1000 cards and 1000 users.
- Built-in card reader for M1 card reading.
- Outdoor application, supports IP65.
- Supports multiple authentication types: card, PIN.


• Specification

System	
ROM	64 K
RAM	8 K
Processor	GD32E230K8
Audio	
▪ Power output	6 W
Interface	
Lock control	1
Exit button	1
Door contact input	1
Alarm output	1
Wiegand	Wiegand out, supports Wiegand 26/34
Capacity	
User capacity	1000
Card capacity	1000
Authentication	
Card type	M1 card
Card reading distance	3 cm
Card reading duration	1 s
General	
Button	Physical buttons
Indicator	Support
Power supply	12 VDC, 1 A
Working temperature	-40 °C to 65 °C (-40 °F to 149 °F)
Working humidity	0 % to 90 % (no condensing)
Protective level	IP 65
Dimensions	151 mm × 48 mm × 21.5 mm (5.9" × 1.9" × 0.8")
Weight	Net weight: 220.3 g (0.5 lb) Rough weight: 352 g (0.8 lb)

• Available Model

HA-AC-S1/HiLook

• Dimension

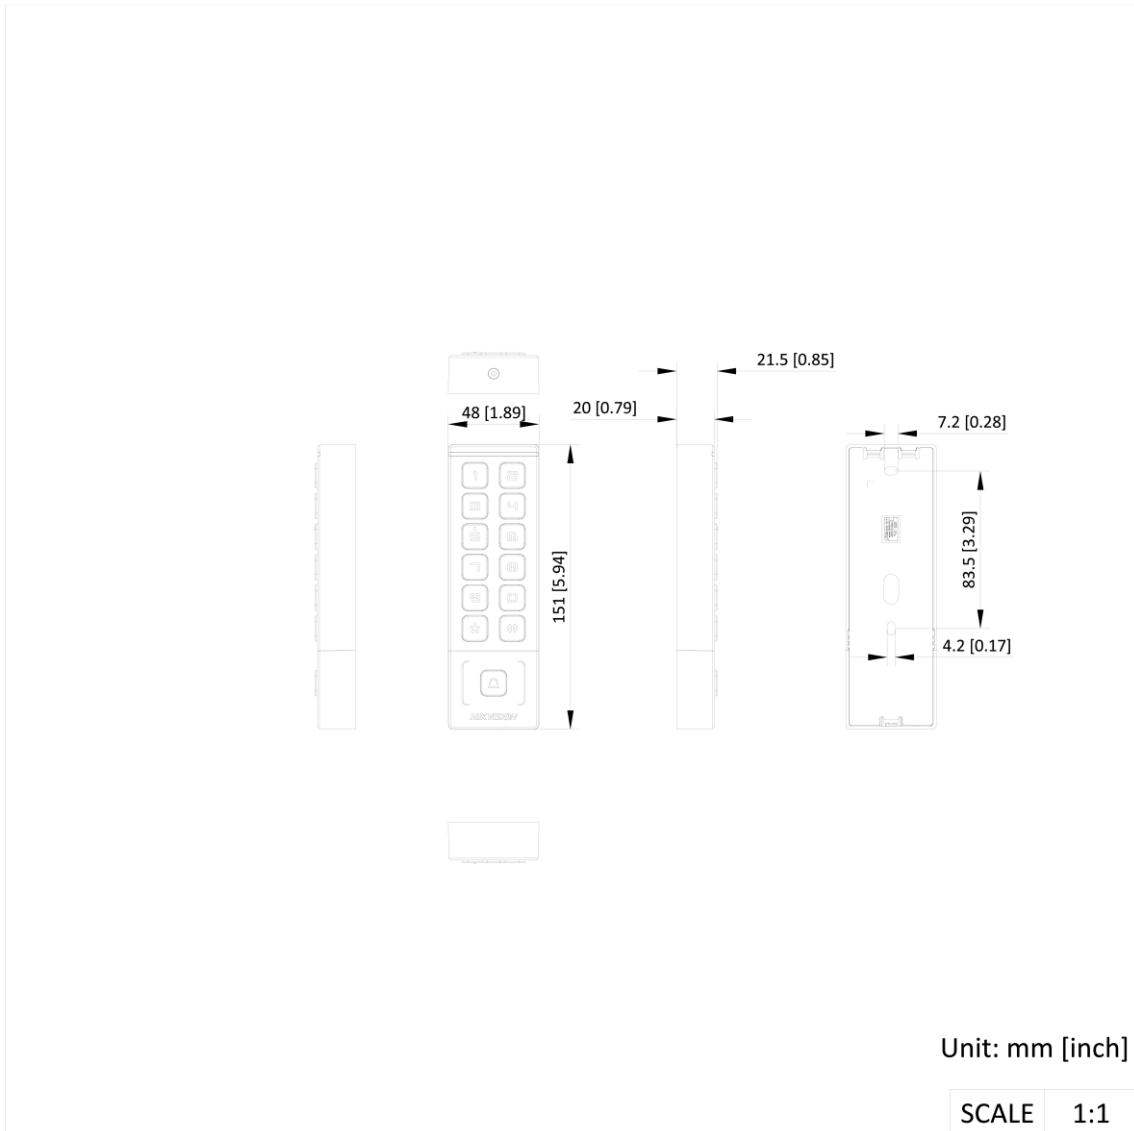

Innovative Electronic Solutions
www.ness.com.au



NSW Ph 02 8825 9222
sales@ness.com.au

VIC Ph 03 9875 6400
nessmelb@ness.com.au

QLD Ph 07 3399 4910
nessbris@ness.com.au

WA Ph 08 9328 2511
nessper@ness.com.au

SA Ph 08 8152 0000
adelaide@ness.com.au