


106-110

## RK5 Two-Way-Radio Key



The Ness RK5 Two Way Radio Key is a versatile and compact fully waterproof Radio Key with 5 buttons programmable to ELK and NESS Two Way Radio interfaces.

- 5 Colour-coded buttons
- 915-927MHz operation with 20 frequency hopping channels for enhanced security
- Dual colour LED display for radio acknowledgment, low battery, armed and alarm state.
- Battery voltage and low battery reporting.

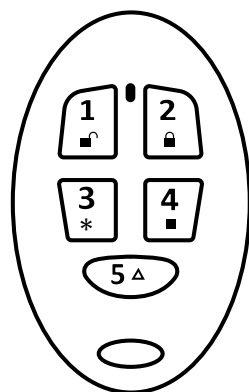

### RK5 BUTTONS

- ① DISARM
- ② ARM
- ③ AUX1
- ④ AUX2
- ⑤ PANIC  
also Press And Hold to Send Learn Message



Another Quality Product  
Designed and Made In Australia by NESS

## LED OPERATION

Flashing Green	RK5 is not programmed to a TWR transceiver or out of range of the programmed transceiver
Solid Red	Message acknowledged

## SPECIFICATIONS

Dimensions	35(W) x 60(H) x 14(D) mm
Compatibility	Ness Two Way Radio receivers
Visual indicators	Bi-colour LED
Battery	CR2032 3V Lithium supplied (replaceable)
Battery life, approx	5 years (If <7 transmissions per day)
Radio Range	100m line of sight
Radio frequency	915.8MHz-927.2MHz 20 channel frequency hopping
Compatibility	101-292 Ness M1 TWR wireless transceiver * 106-304 Ness TWR-SCR standalone transceiver 106-462 Ness X-TWR Interface for D8/D16
Send Learn signal	Press and hold PANIC button for 5 seconds

\* Operation may differ when used with the M1 TWR Interface.

### Ordering Information

106-110 Ness RK5 TWR 5 Button Radio Key



Innovative Electronic Solutions  
www.ness.com.au



**NSW** Ph 02 8825 9222 | **VIC** Ph 03 9875 6400 | **QLD** Ph 07 3399 4910 | **WA** Ph 08 9328 2511 | **SA** Ph 08 8152 0000  
 sales@ness.com.au | nessmelb@ness.com.au | nessbris@ness.com.au | nessper@ness.com.au | adelaide@ness.com.au