


106-110

RK5 Two-Way-Radio Key



The Ness RK5 Two Way Radio Key is a versatile and compact fully waterproof Radio Key with 5 buttons programmable to ELK and NESS Two Way Radio interfaces.

- 5 Colour-coded buttons
- 915-927MHz operation with 20 frequency hopping channels for enhanced security
- Dual colour LED display for radio acknowledgment, low battery, armed and alarm state.
- Battery voltage and low battery reporting.

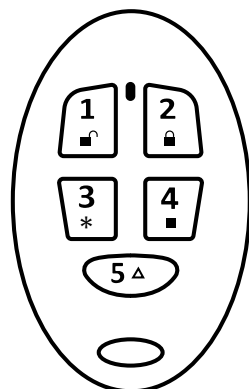






RK5 BUTTONS

- 1 DISARM
- 2 ARM
- 3 AUX1
- 4 AUX2
- 5 PANIC
also Press And Hold to Send Learn Message



Another Quality Product
Designed and Made In Australia by NESS

RK5 BUTTON FUNCTIONS

					
RK5 BUTTON FUNCTIONS		Ness Guardian-4G	Ness D8/D16 with TWR Interface	Ness DPlus with TWR Interface	Elk M1 with TWR Interface
	1	Disarm	Disarm	Disarm	Disarm
	2	Arm	Arm	Arm	Arm
	3	Programmable	Programmable*	Programmable*	Aux/Info
	4	Programmable	Programmable*	Programmable*	[No function]
	5	Panic/Medical/Duress	Panic/Medical/Duress	Panic/Medical/Duress	Programmable

* Functions are determined by the control panel firmware and configuration of AUX outputs. Refer to the control panels' installation manual and conduct tests to satisfy your requirements prior to installation.

LED OPERATION

Flashing Green	RK5 is not programmed to a TWR transceiver or out of range of the programmed transceiver
Solid Red	Message acknowledged

SPECIFICATIONS

Dimensions	35(W) x 60(H) x 14(D) mm
Compatibility	Ness Two Way Radio receivers
Visual indicators	Bi-colour LED
Battery	CR2032 3V Lithium supplied (replaceable)
Battery life, approx	5 years (If <7 transmissions per day)
Radio Range	100m line of sight
Radio frequency	915.8MHz-927.2MHz 20 channel frequency hopping
Compatibility	101-292 Ness M1 TWR wireless transceiver 106-304 Ness TWR-SCR standalone transceiver 106-462 Ness X-TWR Interface for D8/D16
Send Learn signal	Press and hold PANIC button for 5 seconds

Ordering Information

106-110 Ness RK5 TWR 5 Button Radio Key



Innovative Electronic Solutions
www.ness.com.au



NSW Ph 02 8825 9222
sales@ness.com.au

VIC Ph 03 9875 6400
nessmelb@ness.com.au

QLD Ph 07 3399 4910
nessbris@ness.com.au

WA Ph 08 9328 2511
nessper@ness.com.au

SA Ph 08 8152 0000
adelaide@ness.com.au